

A



GET http://example.org/myservice




B



Service Description

INPUT OWL Class
NamedIndividual: things with a "name" property from "foaf" ontology


OUTPUT OWL Class
GreetedIndividual: things with a "greeting" property from "hello" ontology



C



POST http://example.org/myservice

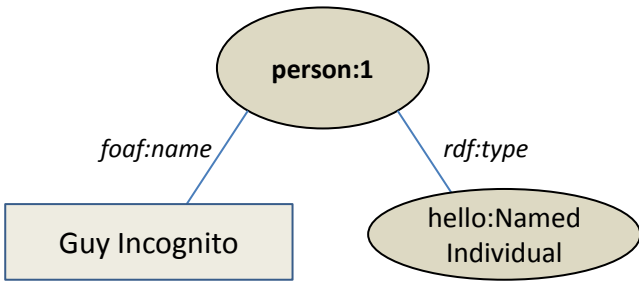

D

